

# 中分式门机装置

Split type door machine device

## XD1416

对应 HB1202 中分式层门装置

Corresponding to HB1202 center opening landing door device




### 产品特点 Product Characteristics

门机采用轿顶安装方式，可选前壁安装  
 门机整体厚度（含轿顶固定支架）为95mm  
 三相异步电机驱动，交流变频控制  
 变频采用专用接口与电梯系统连接  
 异步门刀，同步带传动  
 轿门锁功能

Door operator adopts car top installation, front wall installation is optional  
 The overall thickness of door operator (including car top mounting bracket) is 95mm  
 Three phase asynchronous motor drive, AC variable frequency control  
 Special interface is connected with elevator system for variable frequency control  
 Asynchronous door vane, synchronous belt drive  
 Car door lock function

### 外形和安装尺寸 Overall dimensions and mounting dimensions

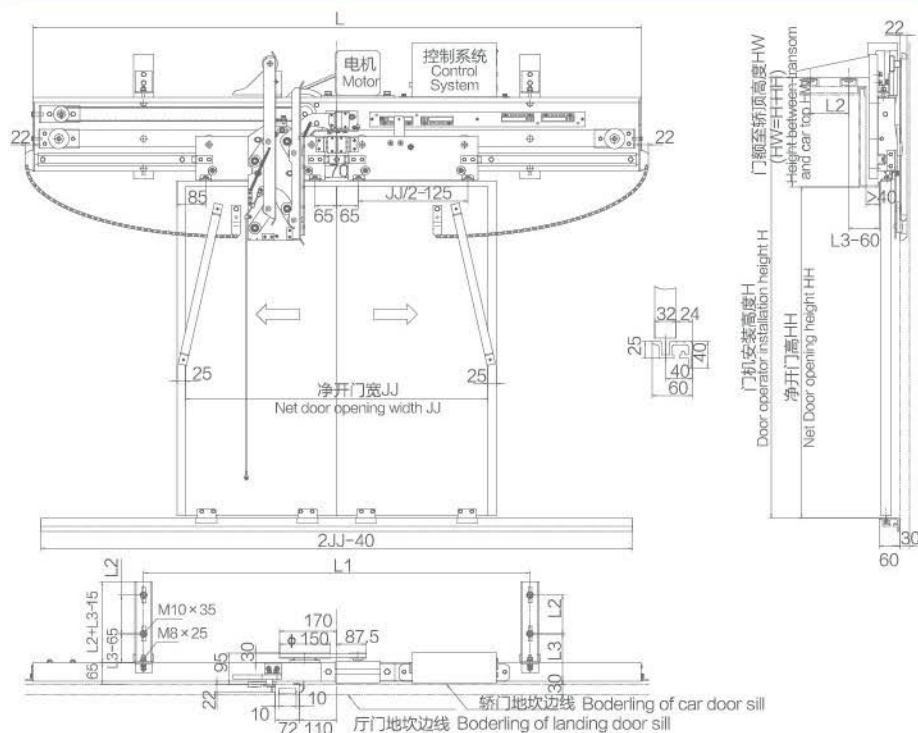

净开门宽 JJ Net door opening width JJ	600	700	800	900	1000	1100	1200
L	1210	1410	1610	1810	2010	2210	2410